

H&O DIE SUPPLY, INC.


sales@hodie.com • 800-222-5441

20" Throat  
with 16" or 24"  
Under the Guide

MODEL

# V20 & V20-24

## Vertical Bandsaw

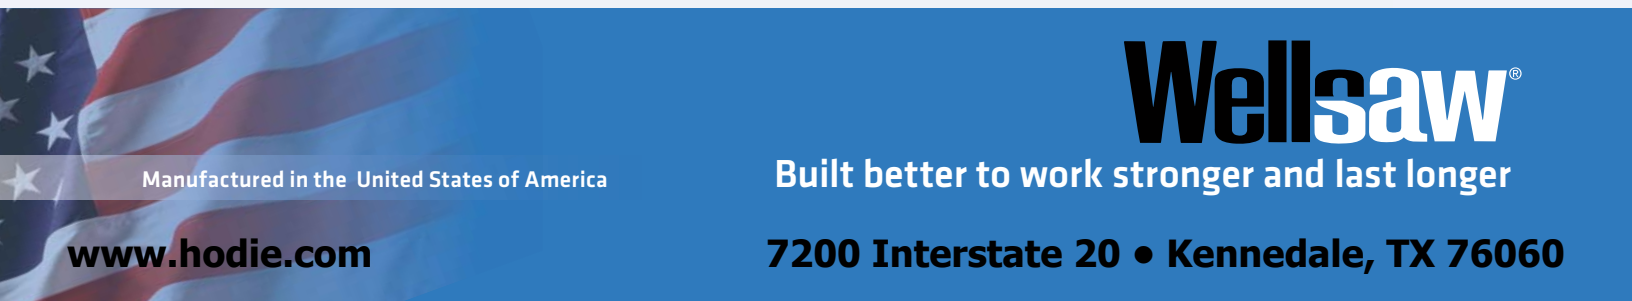

Manufactured in the United States of America

[www.hodie.com](http://www.hodie.com)

# Wellsaw®

Built better to work stronger and last longer

7200 Interstate 20 • Kennedale, TX 76060

# V20 & V20-24

Models V20 & V20-24 Vertical Bandsaws



## Standard Features

- Heavy Tube Steel Frame
- Precision Ground Cast Iron Table with Replaceable Throat Plate
- Unique Heavy Duty Roller Guides
- Rotate 90° to Accommodate Long Materials
- Baldor® Motor
- Magnetic Starter with Undervoltage and Overload Protection
- 115 Volts at Controls
- Two Speed Cast Iron Gearbox with Helical Gears and Oil Bath Lubrication for Quiet Operation
- Blade Speed Indicator
- Blade Tension Indicator
- Flexible Arm Worklight
- Chip Blower (Shop Air)
- Removable Chip Tray
- Tiger-Tooth® Bi-Metal Blade
- OSHA Blade Guarding
- Rotary Blade Brush

## Available Factory Installed Options

- Ideal® Blade Welder, Grinder and Shear
- 24" Extended Height (Model V20-24)
- Miter Gauge
- Rip Fence, 26"
- 1" Blade (Not Available on V-20-24)
- Vector AC Drive Variable Bandspeed
- Spray Mist Coolant System
- Vacuum Nozzle
- Extension Table
- Stock Stand
- 5' and 10' Non-Powered Roller Conveyor
- J.I.C. or NFPA Electrics (with Fused Disconnect)
- Consult Factory for Additional Options

## Specifications

Capacity	
Throat	20" Deep
Table to Guide	16" High
V-20-24	24" High
Blade Size	
Standard	3/16" through 3/4"
Optional	1/2" through 1" (This Option Not Available on V-20-24)
Blade Length	14'9" (177")
V-20-24	16'1" (193")
Band Wheels	21" Cast Aluminum with Replacable Rubber Tires
Blade Speeds	
Low Range	45-400 SFPM
High Range	325-3000 SFPM
Blade Guides	Sealed Ball Bearings with 90° Rotation Feature
Table Size	26" x 26" Cast Iron
Tilt	5° Inside and 45° Outside
Height	37-1/2"
Drive Motor	
Three Phase	3hp 208/230/460 Volt
Single Phase	2hp 115/208/230 Volt
Floor Area	32" Wide x 48" Deep
Height Standard	83-1/2"
V-20-24	91-1/2"
Shipping Weight	
Standard	950 Lbs.
V-20-24	1050 Lbs.