Back-Saving Die Handling

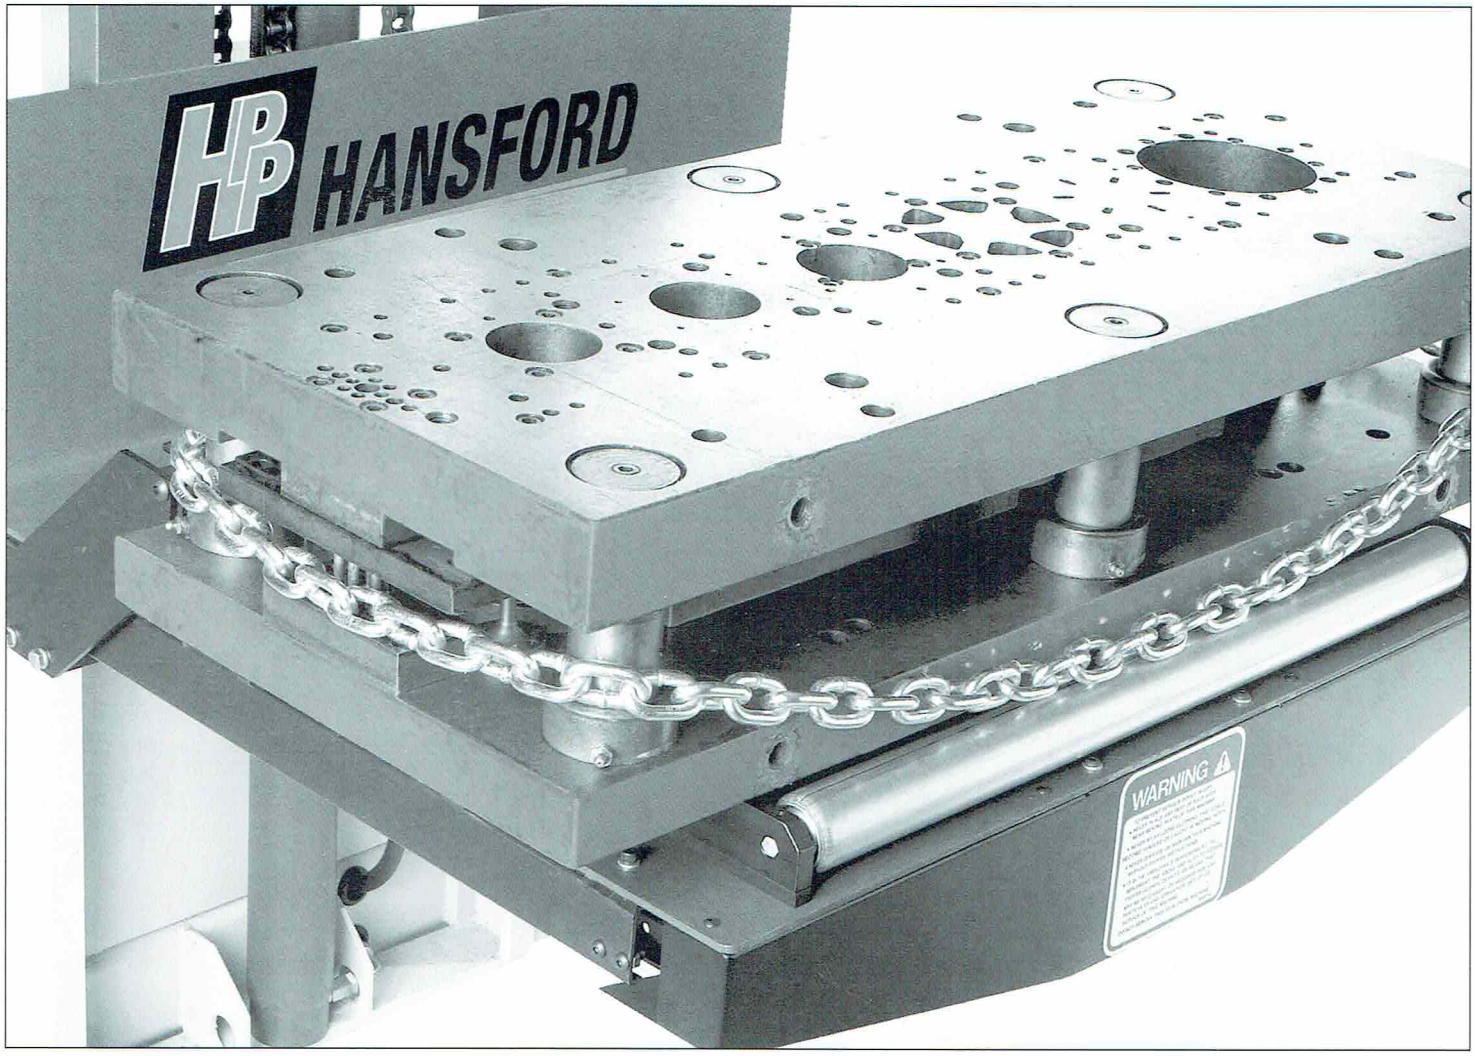

Available from:

H&O DIE SUPPLY, INC.

PRECISION FABRICATING MACHINERY

7200 INTERSTATE 20 • KENNEDALE, TX 76060
PH: 817-985-0040 or 800-222-5441 • FAX: 817-985-0046
EMAIL: sales@hodie.com • WEBSITE: www.hodie.com

HANSFORD Parts and Products

MANUAL WALK BEHIND

These labor-saving units will load and unload dies under power while significantly reducing back strain associated with pushing and pulling dies on and off shelves. Being battery powered, raising the platform along with pushing and pulling die sets on and off the platform is virtually effortless. We offer two series to choose from: (MWB) which is manually moved around, and (PWB) which is powered to accommodate heavier die sets. Built-in battery chargers are standard on both models for convenience of operation. All models are available with one of three platform styles to choose from.

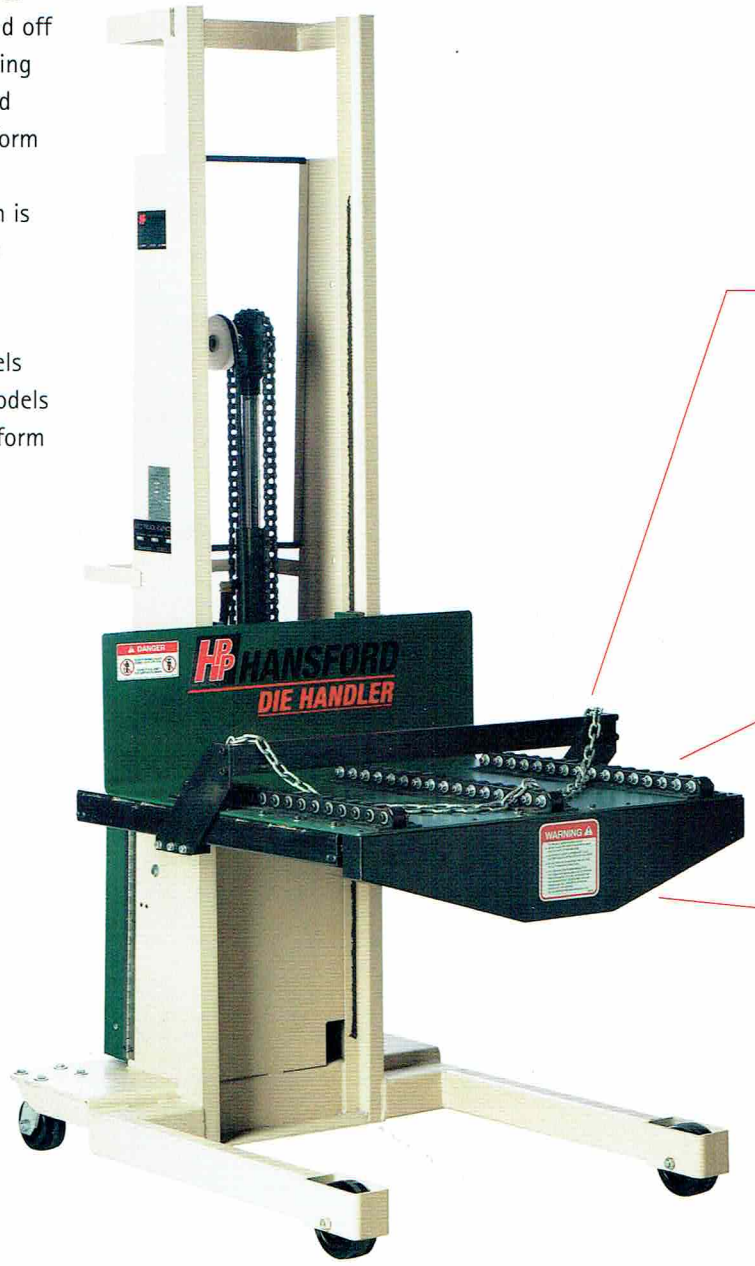

3 rows of rollers

Full width rol

Features

- 1,000 lbs. capacity at 18" load center
- Platform is welded unitized construction for strength and safety
- Roller lift chain with over 9,000 lbs. yield
- Floor lock is standard
- 2" wide phenolic wheels are standard
- Acrylic safety shield provides operator with unobstructed vision
- Includes a heavy-duty deep-cycle battery and a 10 amp automatic built-in charger
- Safety bypass valve to prevent overloading on vertical lift
- All units exceed ASME B53.10 and ANSI Z535 specifications
- Hydraulic check valve on lift cylinder

Specifications

Model Number	Wheel Sizes Front	Rear	* Platform Length Dim. A	* Platform Width Dim. B	Legs ID	Legs OD	* Overall Length Dim. C	* Overall Height Dim. D	Load Center	Platform Lowered Height	Platform Raised Height	Machine Weight
MSE 3058	5"x2"	4"x2"	30"	32"	25"	33"	44 1/4"	72"	18"	10 1/2"	58"	515 lbs.
MSE 3070	5"x2"	4"x2"	30"	32"	25"	33"	44 1/4"	82"	18"	10 1/2"	70"	535 lbs.
MSE 3080	5"x2"	4"x2"	30"	32"	25"	33"	44 1/4"	92"	18"	10 1/2"	80"	550 lbs.

** See illustration on back page*

Note: Guards may have been removed for illustrative purposes

POWERED WALK BEHIND

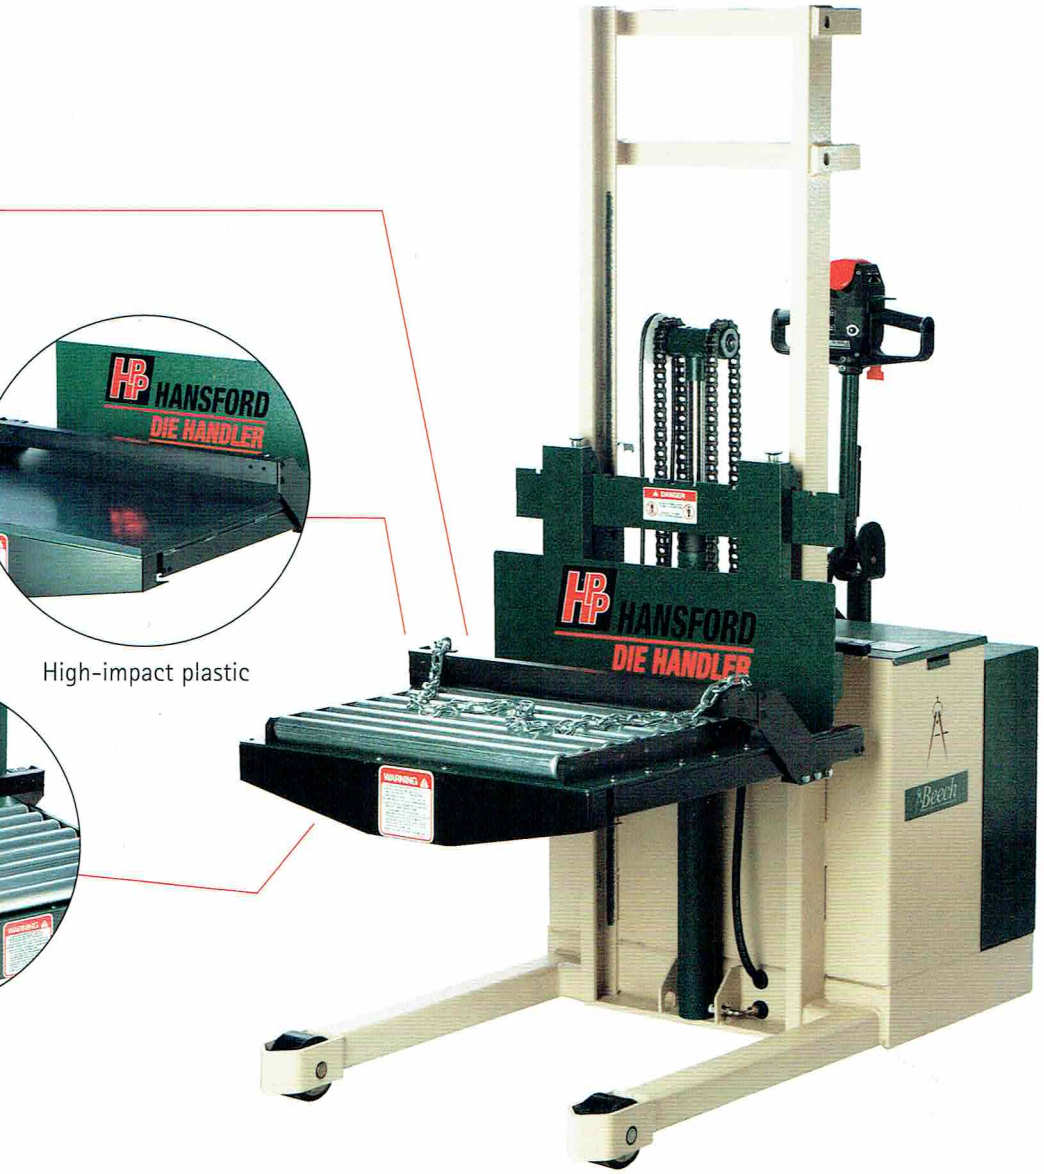

Features

- 2,500 lbs. capacity at 18" load center
- Welded and utilized platform with fork support
- 2 roller lift chains - 9,000 lbs. yield each
- Full feature tiller handle with keylock switch, stepless forward/reverse control, lift and lower control, horn button, safety belly button switch
- 225 AH batteries with 25 amp on-board charger with powered vent, battery indicator, hour meter, low charge lift limit
- 24v operation, emergency disconnect button
- Powered push/pull mechanism for die load/unload
- Hydraulic check valve on lift cylinder

Specifications

Model Number	Wheel Size Front	Wheel Size Drive	* Platform Length Dim. A	* Platform Width Dim. B	Legs ID	Legs OD	* Overall Length Dim. C	* Overall Height Dim. D	Load Center	Platform Lowered Height	Platform Raised Height	Machine Weight	Maximum Die Weight
PWB 3063	5"x3"	10"x3"	30"	32"	24 5/8"	32 1/2"	63"	81"	18"	11"	63"	1,850 lbs.	2,500 lbs.

** See illustration on back page*

Note: Guards may have been removed for illustrative purposes

Manual Walk Behind Series





Powered Walk Behind Series

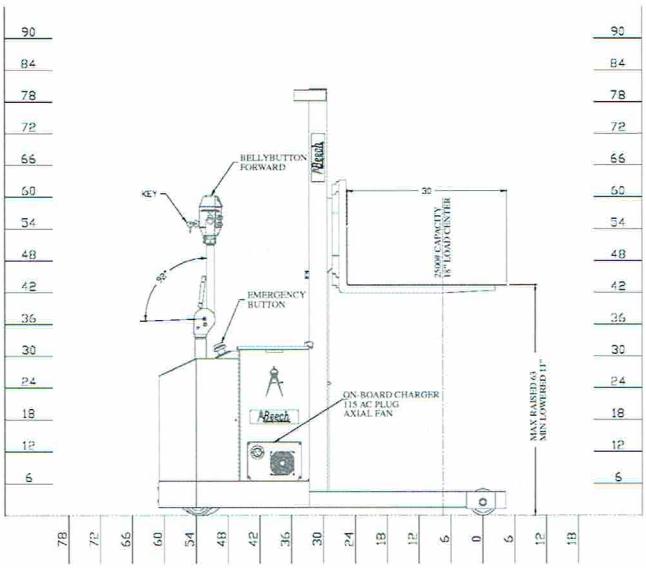

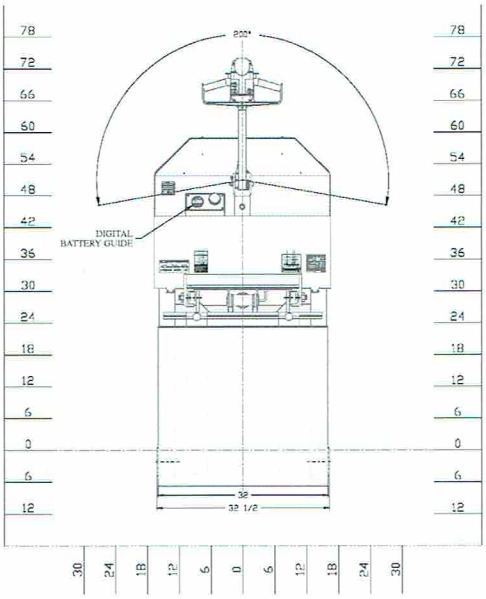

Warranty

Hansford warrants the workability of the Die Cart under normal use, for a period of one (1) year. Hansford Parts and Products warranty is limited to the replacement of defective parts and specifically excludes all claims for consequential damages as defined in Section 2-715 of the Uniform Commercial Code. There are no other warranties.

Warning

To prevent serious bodily injury:

- Never place any part of your body near moving parts of these machines.
- Never wear loose clothing that could become tangled or caught in moving parts.
- Never operate or maintain any of our machines without proper instructions.
- It is the employer's responsibility to implement the above and also to provide proper guards, devices, or means that may be necessary if required for any particular use, operation, set-up, or service of these machines.

Available from:
H&O DIE SUPPLY, INC.
PRECISION FABRICATING MACHINERY
7200 INTERSTATE 20 • KENNEDALE, TX 76060
PH: 817-985-0040 or 800-222-5441 • FAX: 817-985-0046
EMAIL: sales@hodie.com • WEBSITE: www.hodie.com